



Notice

Since the production of this document, Solar Gard has been purchased by Saint-Gobain Performance Plastics Corporation. Solar Gard is now a subsidiary of Saint-Gobain. All references within this document to Bekaert, Bekaert Specialty Films or Bekaert Specialty Films LLC, including but not limited to legal notes, copy and or copyrights are null and void. All rights and responsibilities expressed or written within this document have been transferred from Bekaert Specialty Films, LLC to Saint-Gobain.

Saint-Gobain Performance Plastics
4540 Viewridge Avenue
San Diego, CA 92123 USA
Tel: 877 345 3478
E-mail: info@solargard.com
www.solargard.com

Solar Gard® PV T10

Solar Gard PV T10 backsheet is a bright white film designed to electrically insulate and protect the photovoltaic solar cells from the environment. The standard PVF/PET/PVF design provides an excellent barrier and back side support for the highly sophisticated solar module. For ease of manufacturing, the PV backsheet is available in flexible roll form to fit a wide range of panel sizes and configurations while providing a durable protective layer for sensitive electronic components. The Solar Gard PV T series is manufactured in ISO 9001:2000 and 14001:2004 certified facilities in San Diego, California.

Solar Gard PV T10 Backsheet for photovoltaic modules

	Typical Values		Test Method
	U.S.	Metric	
Thickness	13 mil	330 µm	Caliper
Dielectric Breakdown Voltage	29 kV	29 kV	ASTM D149
Partial Discharge Voltage	1125 VDC*	1125 VDC*	IEC 60664-1
Dimensional Stability (MD/TD) (30 mins. @ 150°C)	0.6/0.2%	0.6/0.2%	ASTM D1204
Tensile Strength (MD/TD)	18600/17300 lb/in ²	128/119 N/mm ²	ASTM D882
Elongation at Break (MD/TD)	232 / 200%	232 / 200%	ASTM D882
EVA peel strength	> 40 lb/in	> 7 N/mm	T - Peel Test
Interlayer peel strength	> 2.85 lb/in	> 0.5 N/mm	180° Peel Test
Moisture Vapor Transmission Rate (38°C / 100% RH)	0.16g/100in ² /day	2.48 g/m ² /day	ASTM F1249




*Partial Discharge Voltage tested at TÜV Rheinland



PVF/PET/PVF

Construction for superior performance, reliability and durability

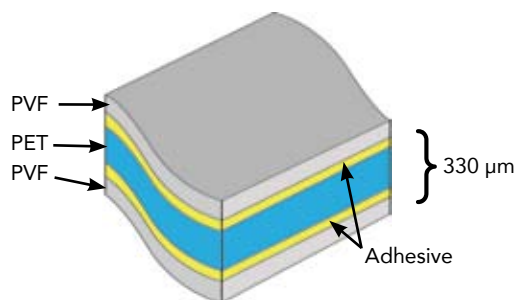

PVF: Polyvinyl Fluoride



UL Recognized Component

NOTICE: All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement, and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated, or that measures may not be required.

www.solargard.com

Bekaert Specialty Films, LLC
 4540 Viewridge Avenue, San Diego, CA 92123
 Contact: Yoshi Okamoto, Sales Manager
 T 858-614-1272, email: yoshihiro.okamoto@bekaert.com