



Notice

Since the production of this document, Solar Gard has been purchased by Saint-Gobain Performance Plastics Corporation. Solar Gard is now a subsidiary of Saint-Gobain. All references within this document to Bekaert, Bekaert Specialty Films or Bekaert Specialty Films LLC, including but not limited to legal notes, copy and or copyrights are null and void. All rights and responsibilities expressed or written within this document have been transferred from Bekaert Specialty Films, LLC to Saint-Gobain.

Saint-Gobain Performance Plastics
4540 Viewridge Avenue
San Diego, CA 92123 USA
Tel: 877 345 3478
E-mail: info@solargard.com
www.solargard.com

Solar Gard® PV T10f

Solar Gard's PV T10f sets a new benchmark for quality and price in the photovoltaic backsheet market. This backsheet combines the tried and tested Tedlar® membrane with an entirely new, proprietary functionalized surface that delivers superior adhesion to EVA. The result is outstanding peel strength and significantly lower total cost of ownership for module manufacturers. Solar Gard PV T10f outperforms third party testing criteria, is UL recognized and performance tested at TÜV. Available in flexible roll form to fit a wide range of solar panel sizes, PV T10f is manufactured in San Diego, California in an ISO 9001:2008 and 14001:2004 certified facility.

Solar Gard PV T10f Backsheet for photovoltaic modules


	Typical Values		Test Method
	U.S.	Metric	
Thickness	12 mil	300 µm	Caliper
Dielectric Breakdown Voltage	19 kV	19 kV	ASTM D149
Partial Discharge Voltage	1100 VDC*	1100 VDC*	IEC 60664-1
Dimensional Stability (MD/TD) (30 mins. @ 150°C)	0.7/0.3%	0.7/0.3%	ASTM D1204
Tensile Strength (MD/TD)	25090/21030 lb/in ²	173/145 N/mm ²	ASTM D882
Elongation at Break (MD/TD)	250/200%	250/200%	ASTM D882
EVA peel strength	>80 lb/in	>14 N/mm	180° Peel Test
Interlayer peel strength	>2.85 lb/in	>0.5 N/mm	180° Peel Test
Moisture Vapor Transmission Rate (38°C / 100% RH)	0.13g/100in ² /day	2.05 g/m ² /day	ASTM F1249



*Partial Discharge Voltage tested at TÜV Rheinland



PVF/PET/functional layer
Construction for superior adhesion,
reliability and durability

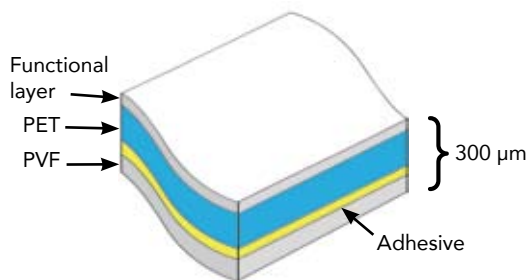

PVF: Polyvinyl Fluoride



UL Recognized Component

NOTICE: All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement, and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated, or that measures may not be required.

www.solargard.com

Bekaert Specialty Films, LLC
4540 Viewridge Avenue, San Diego, CA 92123
Contact: Yoshi Okamoto, Sales Manager
T 858-614-1272, email: yoshihiro.okamoto@bekaert.com