



... FOR A SAFER WORLD FOR BIRDS 



Black Dot and White Dot

"AN EFFECTIVE AND DURABLE SOLUTION FOR A SAFER WORLD FOR BIRDS!"

Each year, hundreds of millions of birds die across Europe due to collisions with windows and glass facades. This issue is a serious concern for nature conservation, as it impacts bird populations and biodiversity.

One major factor is the rise in buildings with high percentages of glass in their facades, which has drastically altered birds' natural habitats. Common solutions, such as stickers resembling birds of prey, have proven largely ineffective in reducing both the frequency and risk of these collisions.

Just as Saint-Gobain seeks solutions to incorporate bird protection measures into new glass designs, Solar Gard is focusing on making existing facades and glazings more bird-friendly.

Special attention is needed for transparent surfaces that offer unobstructed views of the sky, vegetation, and natural landscapes—such as in conservatories, winter gardens, lobbies, lift enclosures, and large glass facades. Buildings in open landscapes or near transport routes present significant hazards for birds. Reflective surfaces are also problematic, as birds cannot distinguish reflected images of trees, branches, or the sky from the real thing. From a bird protection standpoint, reflective glass should be treated with the same urgency as clear glass.

SOLAR GARD WINGSAFE™ MAKES EXISTING FACADES AND GLAZINGS MORE BIRD FRIENDLY

EFFICIENCY VERIFIED THROUGH INDEPENDENT TESTING

1- WingSafe Black Dot: **TF = 4%** (clear glass).
(American Bird Conservatory, USA)
and TF=13% on reflective surface
(WIN-Tests Flugtunnel II, Austria) 

2- A multi-layer product
consisting of optically clear,
outside weatherable, polyester
film with Solar Gard's proprietary
Outside Weatherable hardcoat. 

3- Choice of 2 patterns: White or
Black, integrated in the product.
Unlike solutions with stickers or
standard printed versions, no
risk for discoloration, accidental
removal or damage of the dots. 

4- No edge sealing required on
vertical surfaces. Applied like any
other outside weatherable
window film. 

5- 10 year product warranty
on vertical surfaces.** 

 **6-** Special adhesive allowing
removal without leaving traces
of adhesive on the glass.

 **7-** Standard roll length : 30 m.
Longer rolls possible on a project basis.
Also cut-to-size solutions available.

 **8-** No special maintenance
required. The pattern (dots) do
not interfere with the cleaning.

 **9-** Blocks >99% of the harmful
UV radiation.



TF = 4%*
THREAT FACTOR

 American Bird
Conservancy

Enhancing Existing Glass for a Safer World for Birds.


SAINT-GOBAIN


Solar Gard® WingSafe™ Black Dot and White Dot

Solar Gard WingSafe™ Black Dot has been tested at Foreman's Branch Bird Observatory of the **American Bird Conservancy** (abcbirds.org) resulting in a **TF (Threat Factor) = 4%**. The WingSafe White Dot gave a resulting TF of 19%.


The Threat Factor (TF) of a solution is based on flying at least 80 individual birds down the tunnel and recording whether they fly towards the control or towards the patterned test pane. For example, suppose 100 birds (> 80) flew down the tunnel, with 3 flying towards the test pattern and 97 toward the control. 3% (3/100) of the birds flew towards the test pattern and is then: $TF=3$.

In addition Solar Gard WingSafe™ Black Dot has also been tested at the **Biologischen Station Hohenau-Ringelsdorf, Austria** (WIN-Tests im Flugtunnel II) on a **reflective glass pane (41% reflectivity)**. The TF obtained was **13%** (under sunny conditions) and 16% (clouded conditions).

Typically, tests are conducted on clear glass but, in reality, modern glazing often have reflective coatings to achieve better U-values or G-values. Testing Solar Gard WingSafe™ Black Dot under higher reflectance conditions provided a more rigorous evaluation of its effectiveness, simulating conditions such as reflective glazing or presence of solar window films. Solar Gard WingSafe™ Black Dot is the first and, so far, only product tested specifically on reflective glass.

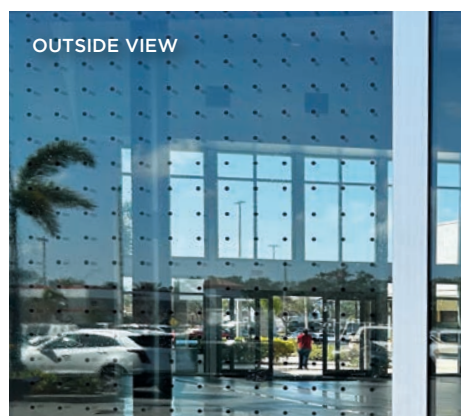

Currently **WingSafe™** comes with 1 pattern and 2 colors 11 mm black or white dots at 65 mm distance in an orthogonal grid.



Coverage: 2,2%

Product Performance and physical characteristics on 6 mm clear double glazing		Solar Gard WingSafe™ Black Dot / White Dot
TF	Threat factor %	4 / 19
Visible Light	Transmittance %	81
	Reflectance exterior %	10
	Reflectance interior %	9
Solar Energy	Total solar energy rejected (TSER) %	26
Ultraviolet Light	UV Blocked @300-380 nm %	>99
Product Thickness (µm)		50
Fire Reaction	EN 13823	B-s1, d0
	NF P92-501	M1

Product Code WingSafe™ Black	SF53000000-56100 (100 FT ROLLS)
	SF53000000-56200 (200 FT ROLLS)
Product Code WingSafe™ White	SF53000001-56100 (100 FT ROLLS)
	SF53000001-56200 (200 FT ROLLS)

Notes

Performance results are calculated using NFRC methodology and LBNL Window software, and are subject to variations within industry standards and only intended for estimating purposes. This data is provided for informational purposes only and are subject to normal manufacturing variances.

*American Bird Conservancy, USA and TF=13% on reflective surface (WIN-Tests Flugtunnel II, Austria) **For details see the Solar Gard SWT&C on www.solargard.eu.

NOTE: The technical information and data are based on the latest product information available at the time of printing. Saint-Gobain Innovative Materials Belgium/Solar Gard and its affiliates assume no liability for accidental typographical or clerical errors. Technical information is subject to change without notice.



solargard.eu/WingSafe

Saint-Gobain Innovative Materials
Belgium SA / Solar Gard
HQ: Avenue Einstein 6
1300 Wavre Belgium
Contact address: Karweg 18
9870 Zulte, Belgium
Tel: +32 (9) 240 95 66

SKEX0141A4WSINT 10/26
© Copyright 2026, Saint-Gobain
Performance Plastics and/or its
affiliates. All Rights Reserved