



THE BEST PAINT PROTECTION
YOU'LL NEVER SEE

Clearshield® Pro MATTE-MX PAINT PROTECTION FILM


Solar Gard's CLEARSHIELD® PRO MATTE-MX is specially formulated paint protection film

Consisting of high-performance pressure sensitive adhesive, TPU film with unique matte surface appearance and excellent stain resistance to protect automotive paint surfaces from harmful effects of stone chips and abrasion.

WHAT IS CLEARSHIELD® PRO MATTE-MX?

Clearshield Pro MATTE-MX is a clear Aliphatic Urethane film (TPU) adhesive coated product engineered to protect surfaces from stains, abrasion and minor surface impact. Clearshield Pro MATTE-MX will bond to a multitude of surfaces and is highly flexible with the ability to handle irregular curved shapes.

- ✓ Appealing matte look high grade polyurethane barrier
- ✓ High stain resistance
- ✓ High hydrophobic properties
- ✓ High resistance against yellowing
- ✓ Improved adhesive for easy application with no glue lines when repositioning
- ✓ Excellent stretchability for ease of installation at door edges, door handle areas, bumpers and mirrors without the use of a steamer or heat gun
- ✓ Low surface texture/orange peel

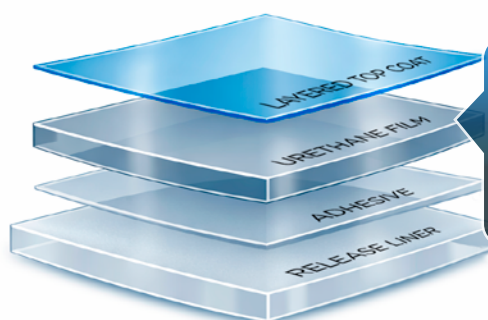

PRODUCT CONSTRUCTION

Overall thickness:	8 mil
Self-healing Hydrophobic topcoat:	0.8 mil
Thickness:	6 mil
Adhesive:	1.2 mil
Matte liner thickness:	3 mil

Solar Gard's Clearshield® PRO MATTE-MX is a virtually undetectable paint protection film that provides vehicles with a durable and optically clear barrier for chip-prone surfaces.

- 1- Protects surfaces from damage caused by gravel, sand, stones, road salt and insects ✓
- 2- High gloss surface and optical clarity allows original paint color to shine through ✓
- 3- Easy maintenance ✓
- 4- In the unlikely event that the product is damaged, it can be easily peeled away exposing undamaged factory paint like the day Clearshield Pro MATTE-MX was installed ✓



- 5- Up to 5 year limited manufacturer's warranty* ✓
- 6- Will remain optically clear and stay in place ✓
- 7- Won't crack, peel, bubble or harm paint finish upon removal ✓
- 8- Warranted against excessive yellowing and other manufacturer defects ✓

*For further informations check the detailed Sales terms and Conditions on www.solargard.eu

Clearshield Pro MATTE-MX delivers superior protection with a 5 year warranty!



Clearshield® Pro **MATTE-MX** PAINT PROTECTION FILM

VEHICLES - PUBLIC TRANSPORT

TYPICAL PROPERTIES

DESCRIPTION	SPECIFICATIONS
Adhesive Deposit (GSM)	1.2 mil
Elongation Test method: Instron	>250%
Haze	<3.0%
Roll width	60 inch
Roll length	50 ft.

TECHNICAL DATA

	TEST ITEM	TEST METHOD	NOMINAL VALUE
PHYSICAL PROPERTIES	TPU Thickness	Micrometer	6 mil (150 microns)
	Product Thickness (HC+TPU+PSA)	Micrometer	7.5 mil (190 microns)
	Release Liner Thickness	Micrometer	3 mil (75 microns)
	Tensile Strength at Break	ASTM D882	>20 MPa (200 kg/cm ² or 2900 psi)
	Elongation at Break		>250%
	Break Strength		29.5 lbs./in (51 N/cm)
PERFORMANCE DATA	Gloss	Adhered to paint panel, 60° gloss per ASTM D523	80 GU MIN
	Water Immersion	Adhered to paint panel, 40°C in water	
	Heat Aging	Adhered to paint panel, 80°C 168 hrs	Pass, NDE
	Chemical Resistance	Diesel (drop test, 10 min) SAE motor oil (drop test, 10 min) Hydraulic oil (drop test, 10 min) Water and soap resistance (drop test, 10 min) Battery acid (drop test, 10 min)	Pass, NDE Pass, NDE Pass, NDE Pass, NDE Pass, NDE

HC = Hard Coat, TPU = Thermal Plastic Polyurethane, PSA = Pressure Sensitive Adhesive NDE: No Detrimental Effect
 Note: All values are nominal values and should not be used for specification purposes.

SHELF LIFE:

Solar Gard recommends using Clearshield Pro X within one year from date of purchase.
 Optimum storage conditions for Clearshield Pro X are 4°C to 32°C, and 40% to 60% relative humidity.

APPLICATION CONDITIONS:

- The vehicle's surface and the ambient air temperature should be between 20°C to 30°C.
- Application should be done in a dust free area and away from direct sunlight.
- Good surface preparation is essential.
- Do not use adhesion promoters nor aggressive degreasing on large surfaces.
- IPA can be used to degrease the edges.

Product Code	60" (152 cm)	SF7CSPROMX6050
Clearshield Pro MATTE-MX	72" (183 cm)	SF7CSPROMX7250

* for further informations check the detailed Sales terms and Conditions on www.solargard.eu



solargard.eu

Saint-Gobain Innovative Materials
 Belgium SA / Solar Gard
 HQ: Avenue Einstein 6
 1300 Wavre Belgium
 Contact address: Karreweg 18
 9870 Zulte, Belgium
 Tel: +32 (9) 240 95 66

PDF0141A4CSPMXINT 03/26
 © Copyright 2026, Saint-Gobain
 Performance Plastics and/or its
 affiliates. All Rights Reserved